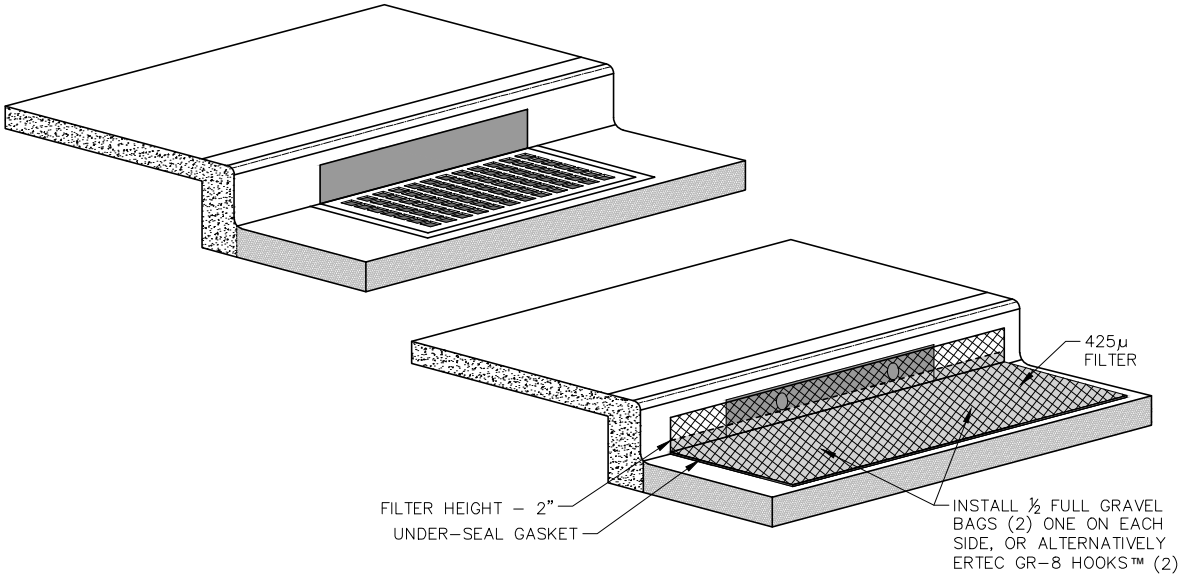


NOTES:

1. INLET PROTECTION SHALL BE MAINTAINED OR REPLACED AT THE DIRECTION OF THE OWNER.
2. (MANUFACTURED ALTERNATIVES APPROVED AND LISTED ON THE MINNESOTA DEPARTMENT OF TRANSPORTATION'S EROSION CONTROL PRODUCT ACCEPTABILITY LIST MAY BE SUBSTITUTED.)
3. WHEN REMOVING OR MAINTAINING INLET PROTECTION, CARE SHALL BE TAKEN SO THAT THE SEDIMENT TRAPPED ON THE GEOTEXTILE FABRIC DOES NOT FALL INTO THE INLET. ANY MATERIAL FALLING INTO THE INLET SHALL BE REMOVED IMMEDIATELY.

INSTALLATION NOTES:

1. PLACE DEVICE TIGHTLY AGAINST DRAIN OPENING AND COVER ENTIRE GRATE. THE DEVICE SHOULD EXTEND AT LEAST 2 INCHES PAST GRATE TOWARD STREET.
2. OVERLAP THE SEGMENTS AT LONGER OPENINGS.
3. ANCHOR THE DEVICE SO THAT WATER CANNOT FLOW BEHIND IT.

INLET PROTECTION - CURB GRATE		CITY ENGINEER APPROVED: BLO	DATE: 08.23.19
SECTION No. 312500	DRAWING No. 1	PUBLIC WORKS APPROVED: RAS	DATE: 08.23.19
CITY OF KINDRED ENGINEERING		CITY COUNCIL APPROVED DATE: 07.17.19	